


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9001 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 9 V-BELT DRIVE

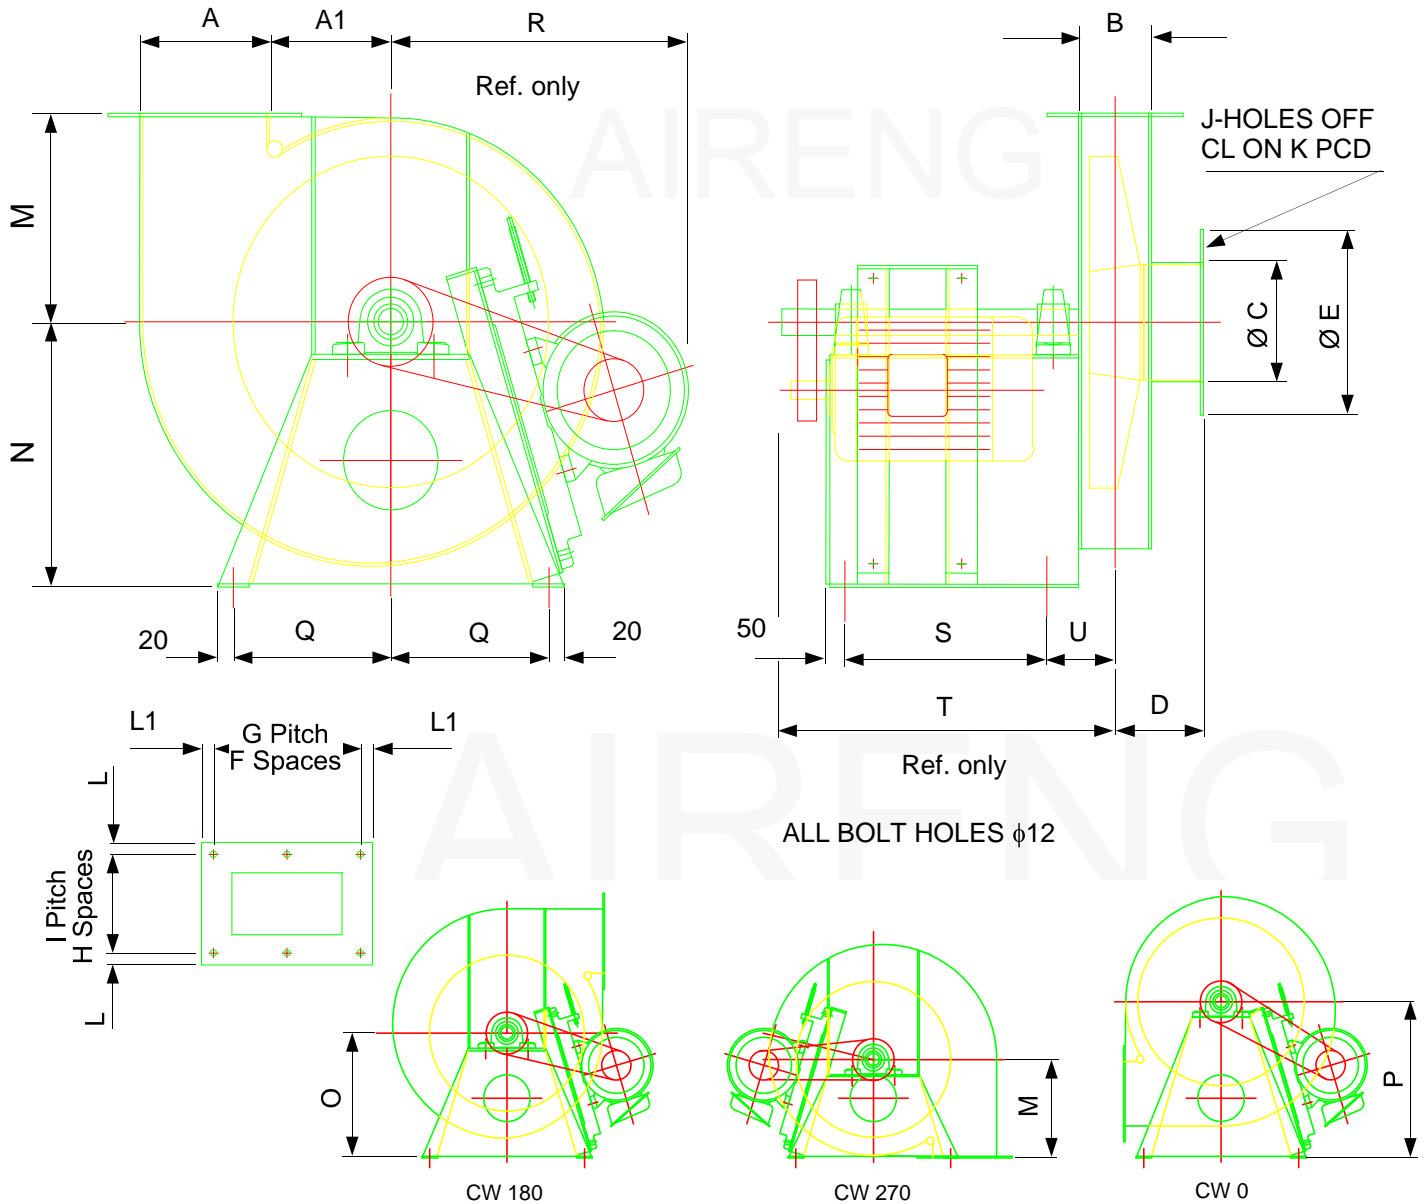

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg	kW
300-00	40	140	40	50	90	130	1	90	1	90	4	100	15	15	165	185	180	230	160				50		
400-00	55	185	45	65	100	145	1	105	1	95	4	115	15	15	220	245	240	290	160				75		
500-00	60	240	55	80	100	160	1	110	1	105	4	130	15	15	280	305	295	350	180				75		
600-00	70	295	65	95	110	175	1	120	1	115	4	145	15	15	340	360	350	415	250				75		
700-00	95	330	75	105	120	185	1	145	1	125	4	155	15	15	400	420	410	475	300				85		
800-00	110	375	85	120	120	220	1	170	1	145	4	180	20	20	450	480	465	545	300				95		
900-00	120	425	90	135	120	235	2	180	1	150	4	195	20	20	500	535	520	605	300				95		

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 1400 RPM Three Phase Motor, Bearings, V-Drive, Slide rails, Shaft / Belt Guards, Shaft and Pedestal

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS
 Form no. /masters/arr.9/D9001.pub ISSUE DATE 04-11-98 Rev.2Form no. /