


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9002 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 4F-DIRECT DRIVE

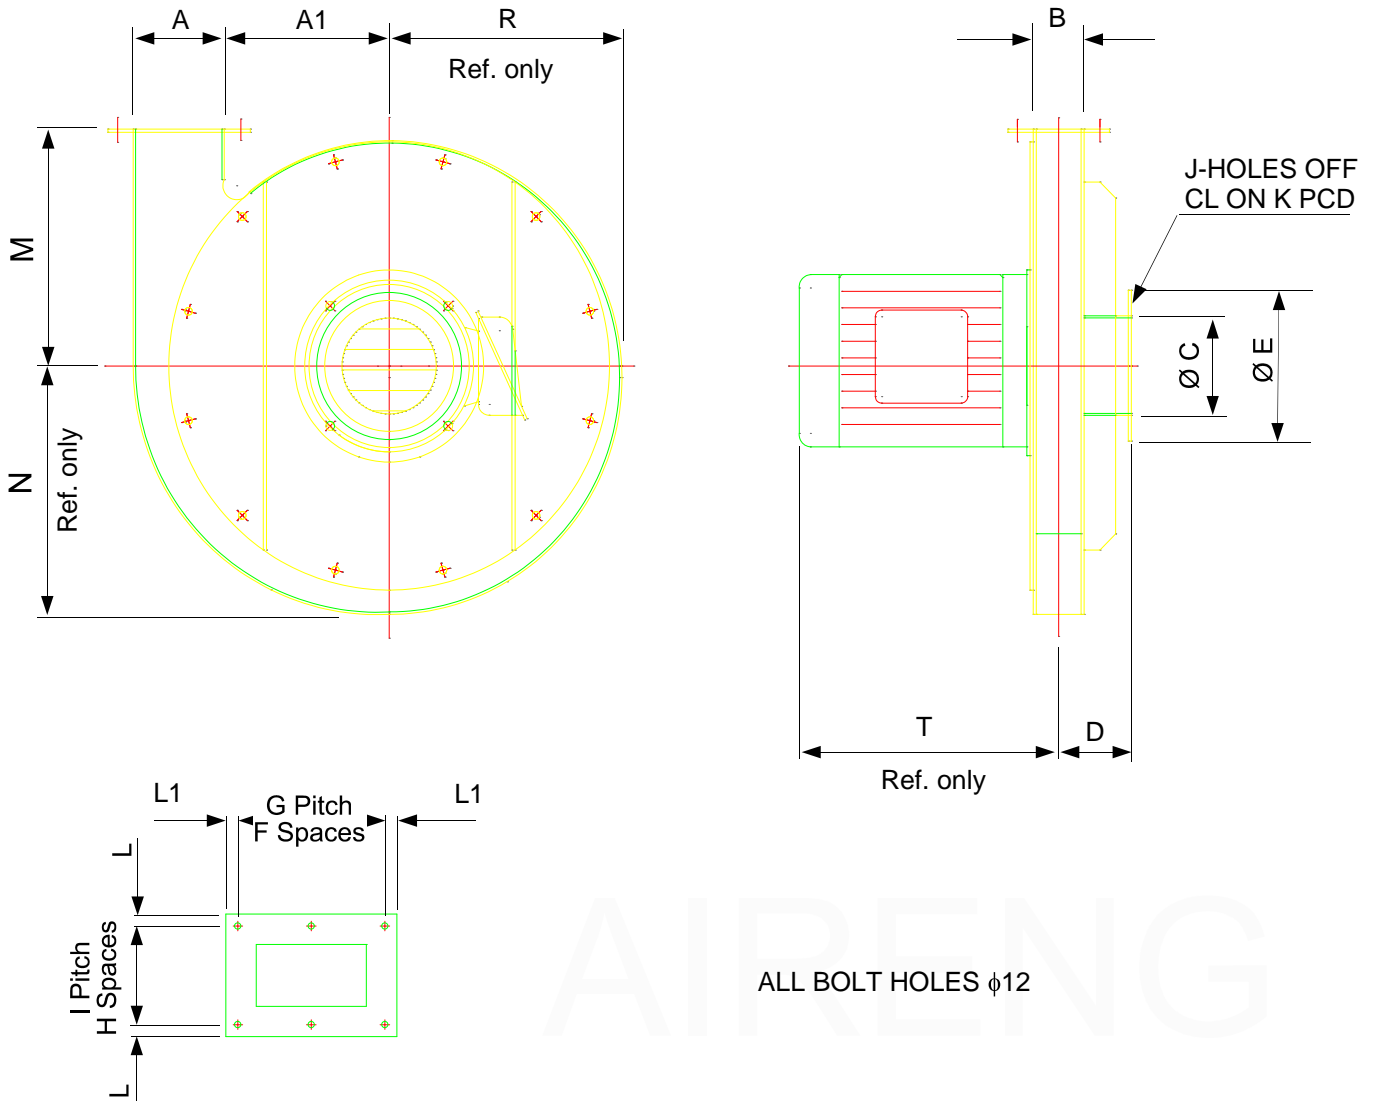

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	R	T	kg Max	kW Max
300-00	60	130	45	70	90	150	1	110	1	95	4	120	15	15	170	179	180	220		.55
400-00	75	175	55	90	100	170	1	125	1	105	4	140	15	15	225	239	230	300		2.2
500-00	90	220	65	110	100	190	1	140	1	115	4	160	15	15	280	299	290	470		5.5
600-00	115	260	75	130	100	210	1	165	1	125	4	180	15	15	340	359	345	515		15
700-00	130	305	90	145	120	225	1	180	1	140	4	195	15	15	400	419	405	550		18
800-00	150	350	100	165	150	265	2	105	1	160	4	225	20	20	450	478	460	635		22
900-00	170	395	110	185	150	285	2	115	1	170	4	245	20	20	510	538	520	770		30

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 2900 RPM Three Phase and Motor.

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.4F/D9002.PUB

ISSUE DATE: 05-10-98

REV.2