


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9003 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 4 - DIRECT DRIVE

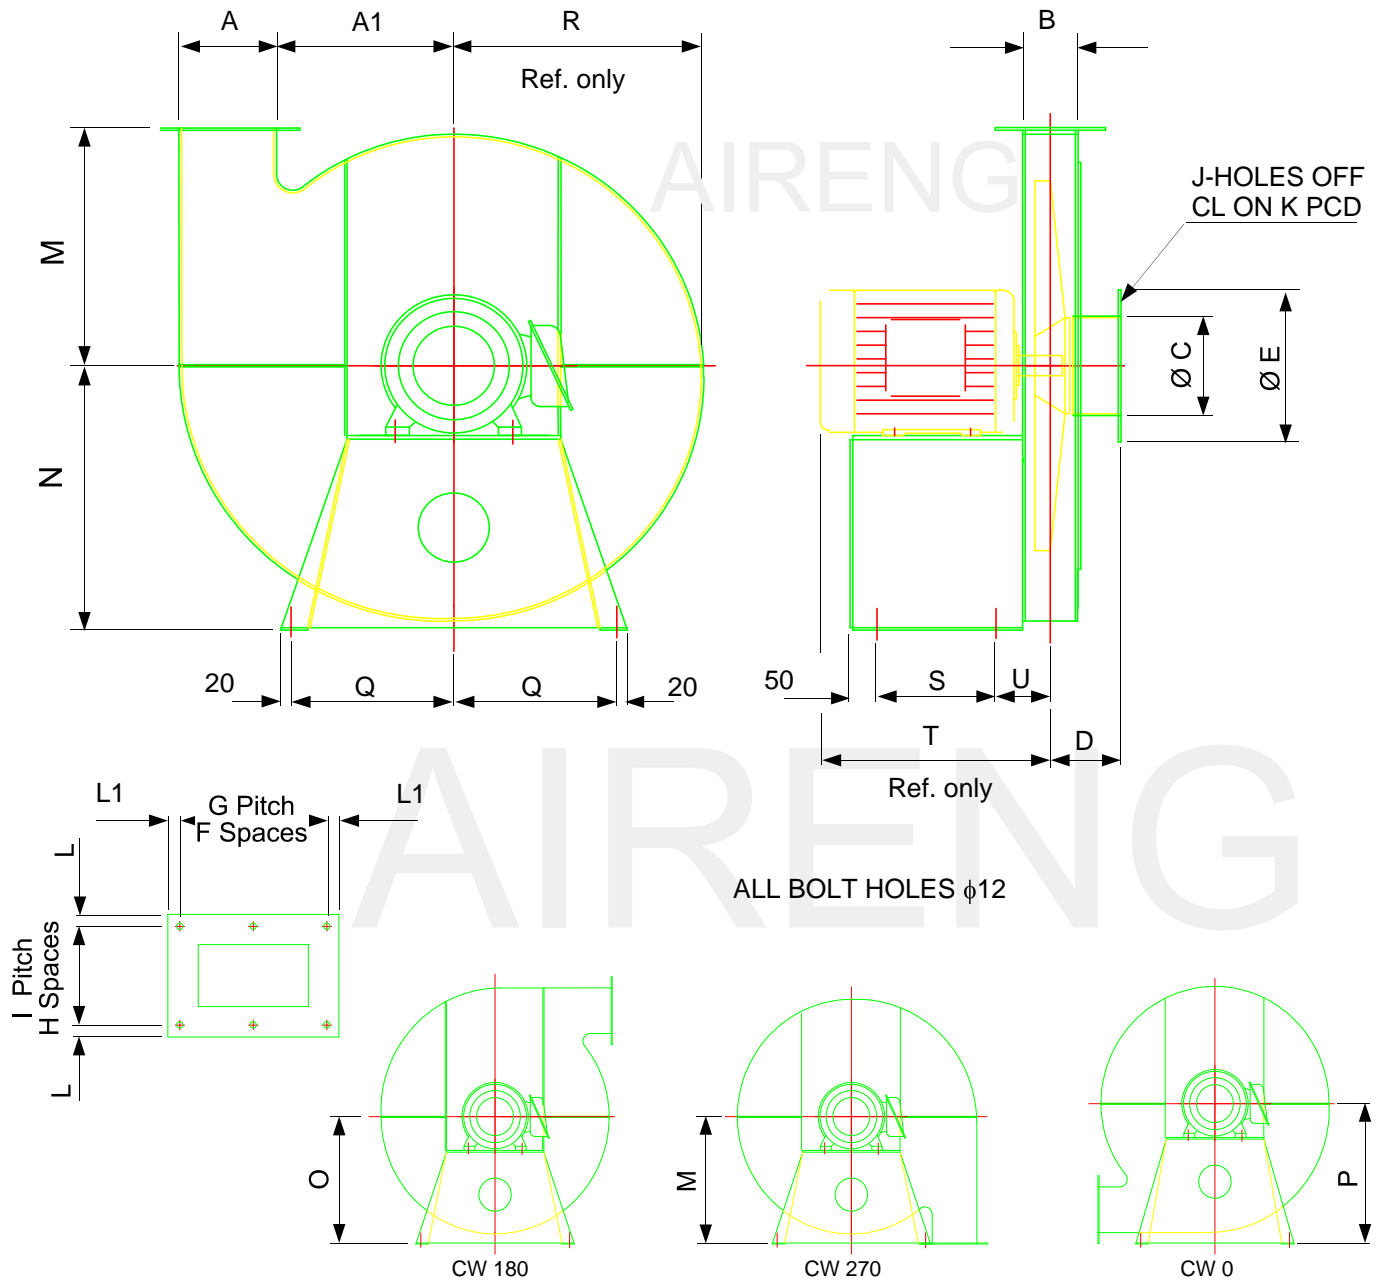

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg Max.	kW Max.
300-00	80	135	50	85	100	165	1	130	1	100	4	135	15	15	210	215	205	265	160	195	100	250	75	55	.55
400-00	100	190	65	105	100	185	1	150	1	115	4	155	15	15	255	285	270	340	160	260	180	310	80	100	3
500-00	120	240	80	130	105	210	1	170	1	130	4	180	15	15	310	350	335	410	180	325	300	475	90	180	5.5
600-00	150	280	90	155	120	235	1	200	1	140	4	205	15	15	370	420	400	480	250	390	300	525	95	295	15
700-00	180	330	105	190	130	270	2	115	1	155	4	240	15	15	450	490	465	560	300	455	300	560	100	300	18
800-00	205	375	120	215	140	315	2	132	1	180	4	275	20	20	510	555	530	640	300	520	525	400	110	350	22
900-00	230	420	130	240	150	340	2	145	1	190	4	300	20	20	575	625	595	710	300	585	450	700	115	550	30

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 2900 RPM Three Phase Motor and Pedestal
 OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS