


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9003 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 9 V-BELT DRIVE

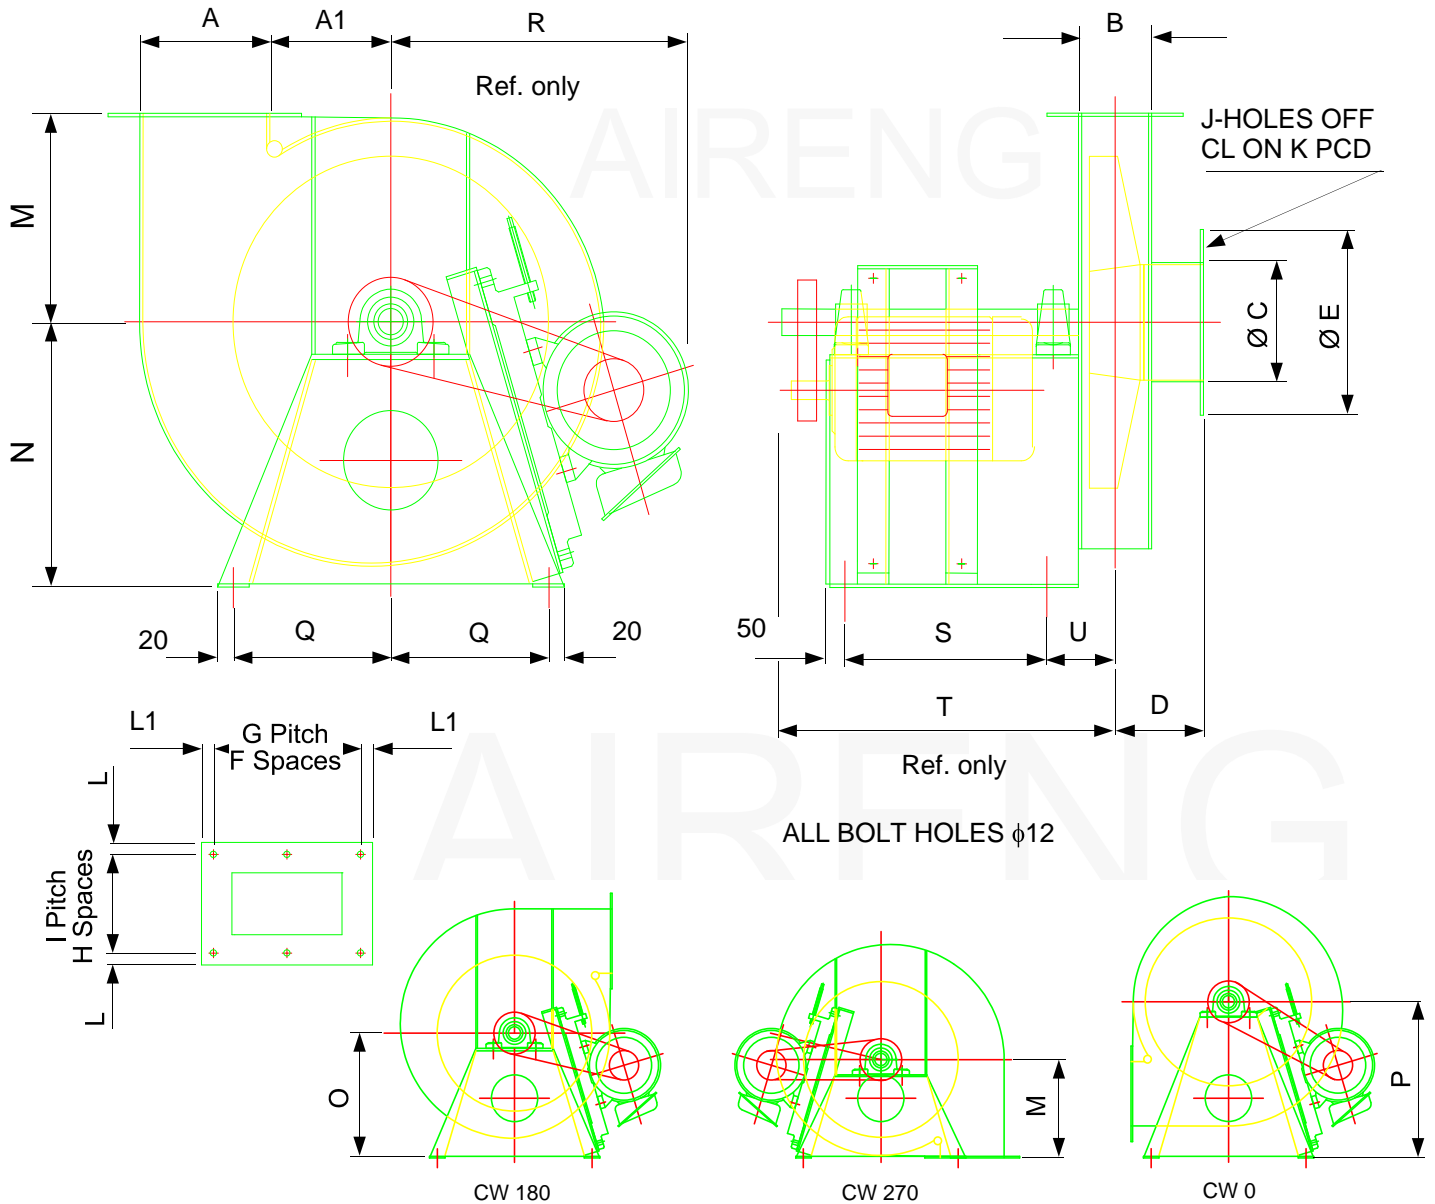

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg	kW
300-00	80	135	50	85	100	165	1	130	1	100	4	135	15	15	210	215	205	265	160				75		
400-00	100	190	65	105	100	185	1	150	1	115	4	155	15	15	255	285	270	340	160				80		
500-00	120	240	80	130	105	210	1	170	1	130	4	180	15	15	310	350	335	410	180				90		
600-00	150	280	90	155	120	235	1	200	1	140	4	205	15	15	370	420	400	480	250				95		
700-00	180	330	105	190	130	270	2	115	1	155	4	240	15	15	450	490	465	560	300				100		
800-00	205	375	120	215	140	315	2	132	1	180	4	275	20	20	510	555	530	640	300				110		
900-00	230	420	130	240	150	340	2	145	1	190	4	300	20	20	575	625	595	710	300				115		

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 1400 RPM Three Phase Motor, Bearings, V-Drive, Slide rails, Shaft / Belt Guards, Shaft and Pedestal

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.9/D9003.pub

ISSUE DATE 04-11-98

Rev.3