


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9004 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 9 V-BELT DRIVE

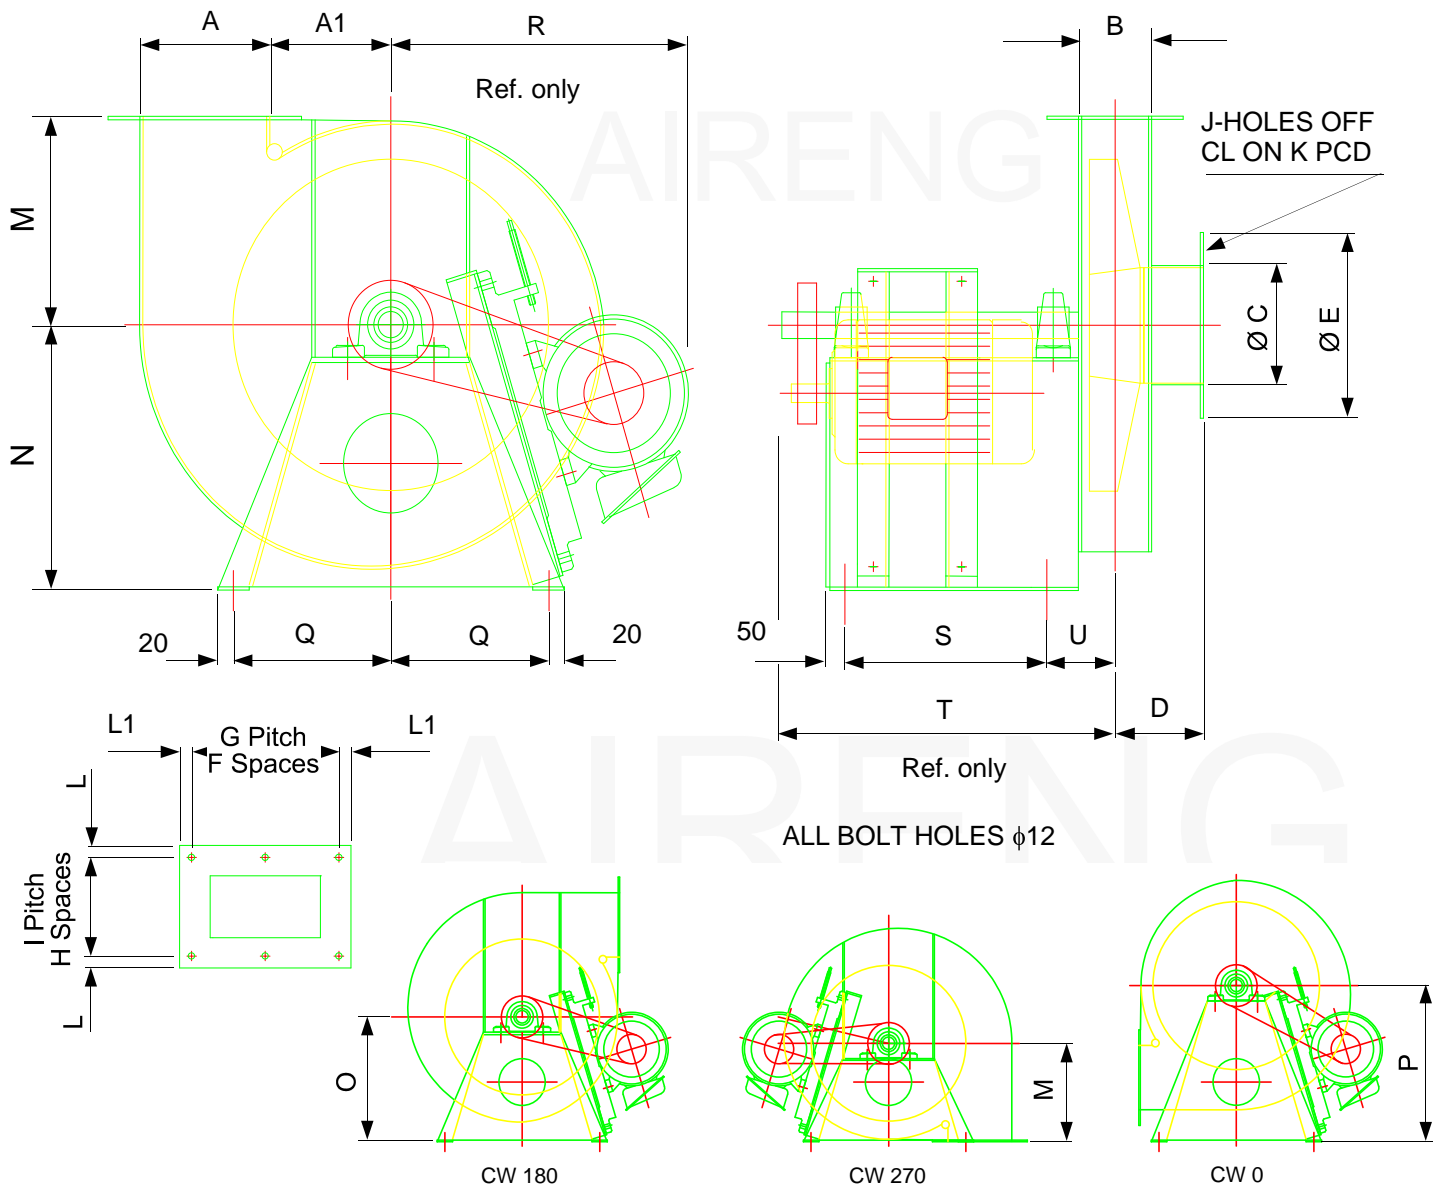

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg	kW
300-00	125	115	75	110	110	190	1	175	1	125	4	160	15	15	190	230	210	290	160				85		
400-00	165	155	95	145	120	225	1	215	1	145	4	195	15	15	275	300	275	370	160				100		
500-00	210	190	120	180	140	260	2	130	1	170	4	230	15	15	345	370	340	450	250				110		
600-00	250	230	140	215	140	295	2	150	2	95	4	265	15	15	375	445	410	530	250				120		
700-00	290	265	160	250	150	330	2	170	2	105	8	300	15	15	430	520	475	605	300				130		
800-00	320	310	180	285	160	385	2	190	2	120	8	345	20	20	525	590	540	690	350				140		
900-00	370	350	205	320	190	420	2	215	2	132	8	380	20	20	555	660	610	780	400				155		

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 1400 RPM Three Phase Motor, Bearings, V-Drive, Slide rails, Shaft / Belt Guards, Shaft and Pedestal

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.9/D9001.pub

ISSUE DATE 04-11-98

Rev.2