
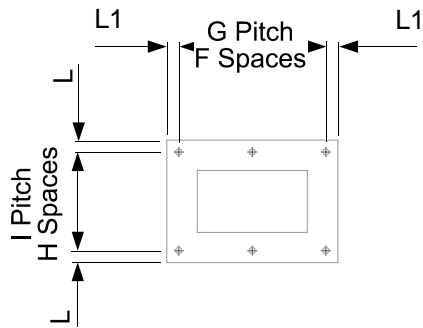
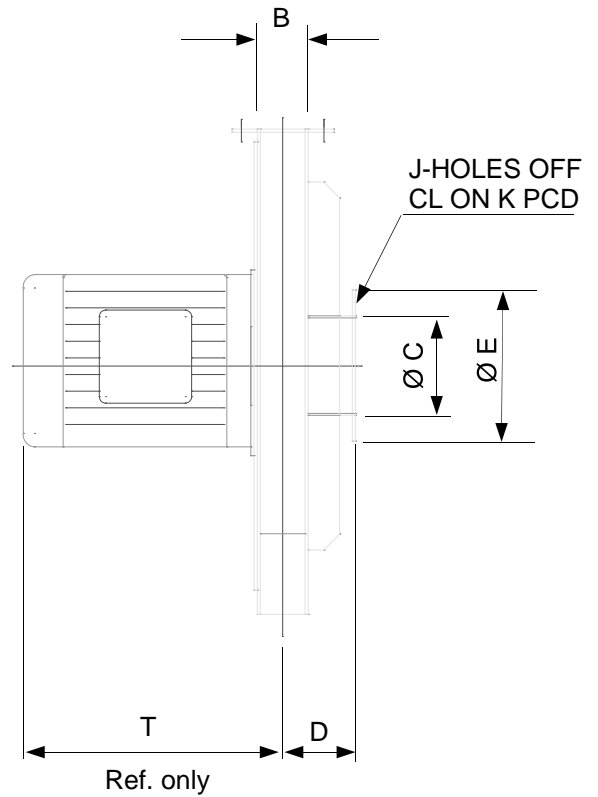


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9005 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 4F-DIRECT DRIVE

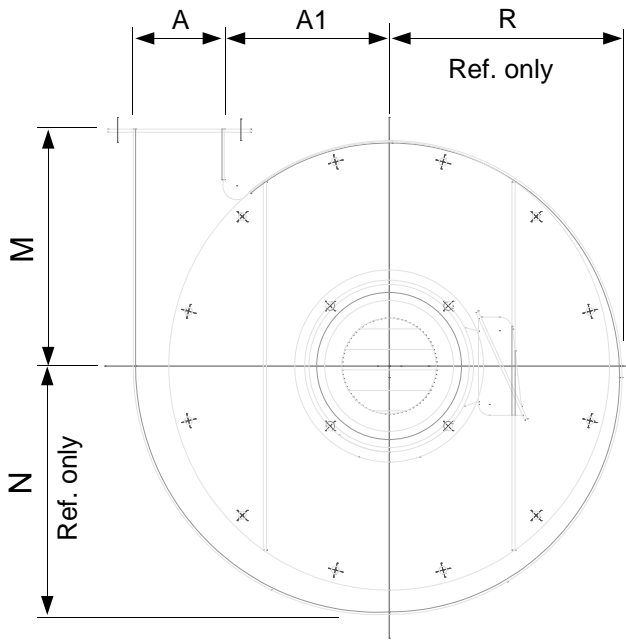

ALL BOLT HOLES $\phi 12$

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	R	T	kg Max	kW Max
300-00	120	125	100	125	110	205	1	170	1	150	4	175	15	15	190	224	204	320		2.2
400-00	160	165	130	170	140	250	2	105	2	90	4	220	15	15	250	298	272	440		7.5
500-00	210	200	160	210	155	290	2	130	2	105	8	260	15	15	320	372	340	470		15
600-00	240	250	190	250	165	330	2	145	2	120	8	300	15	15	370	447	407	725		30
700-00	290	285	220	290	180	370	2	170	2	135	8	340	15	15	430	522	475	790		30
800-00	320	330	250	330	200	430	2	190	2	155	8	390	20	20	500	596	543	1120		30
900-00	360	370	280	370	220	470	2	210	2	170	8	430	20	20	550	670	611	1130		30

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 2900 RPM Three Phase and Motor.

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.4F/D9005.PUB

ISSUE DATE: 05-10-97

REV.2