


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9005 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 4 - DIRECT DRIVE

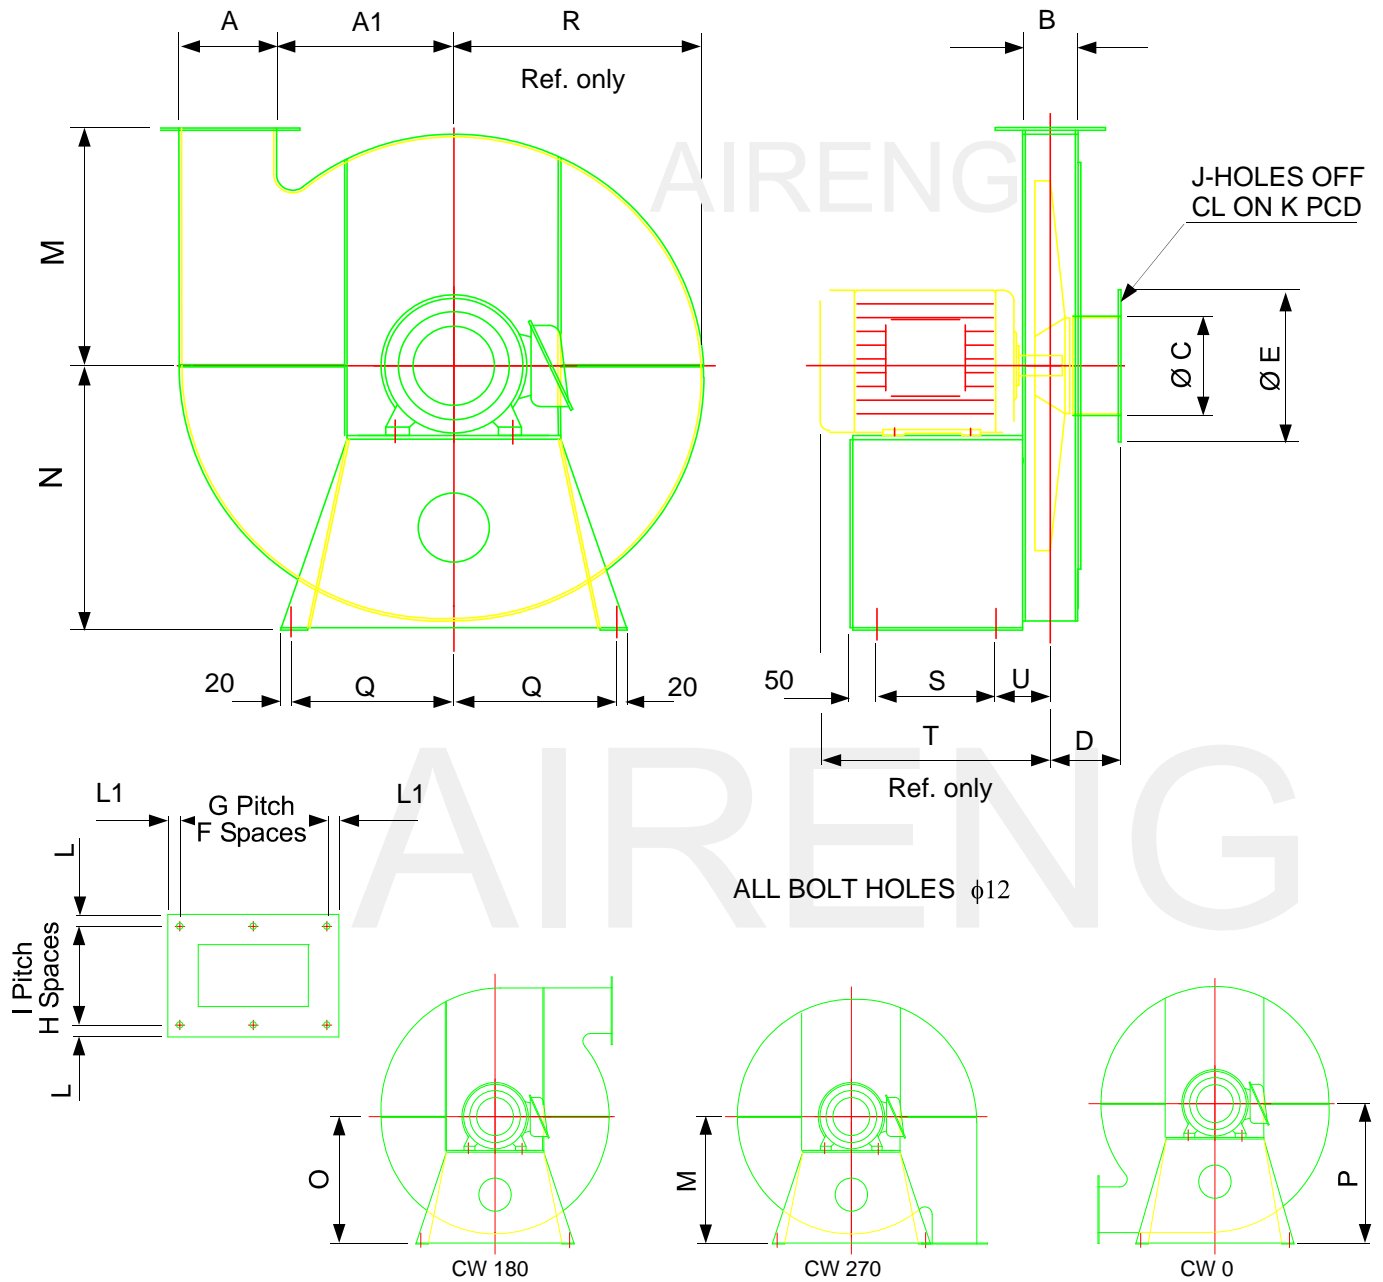

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg Max.	kW Max.
300-00	120	125	100	125	110	205	1	170	1	150	4	175	15	15	190	235	215	295	160	204	180	320	100	65	2.2
400-00	160	165	130	170	140	250	2	105	2	90	4	220	15	15	250	310	280	375	180	272	300	440	115	140	7.5
500-00	210	200	160	210	155	290	2	130	2	105	8	260	15	15	320	380	350	460	250	340	300	470	130	170	15
600-00	240	250	190	250	165	330	2	145	2	120	8	300	15	15	370	450	415	540	300	407	450	725	145	540	30
700-00	290	285	220	290	180	370	2	170	2	135	8	340	15	15	430	530	485	625	350	475	450	790	160	920	55
800-00	320	330	250	330	200	430	2	190	2	155	8	390	20	20	500	605	555	710	400	543	600	1120	175	1400	110
900-00	360	370	280	370	220	470	2	210	2	170	8	430	20	20	550	680	620	790	400	611	600	1130	190	1450	110

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 2900 RPM Three Phase Motor and Pedestal
 OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS