


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9005 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 9 V-BELT DRIVE

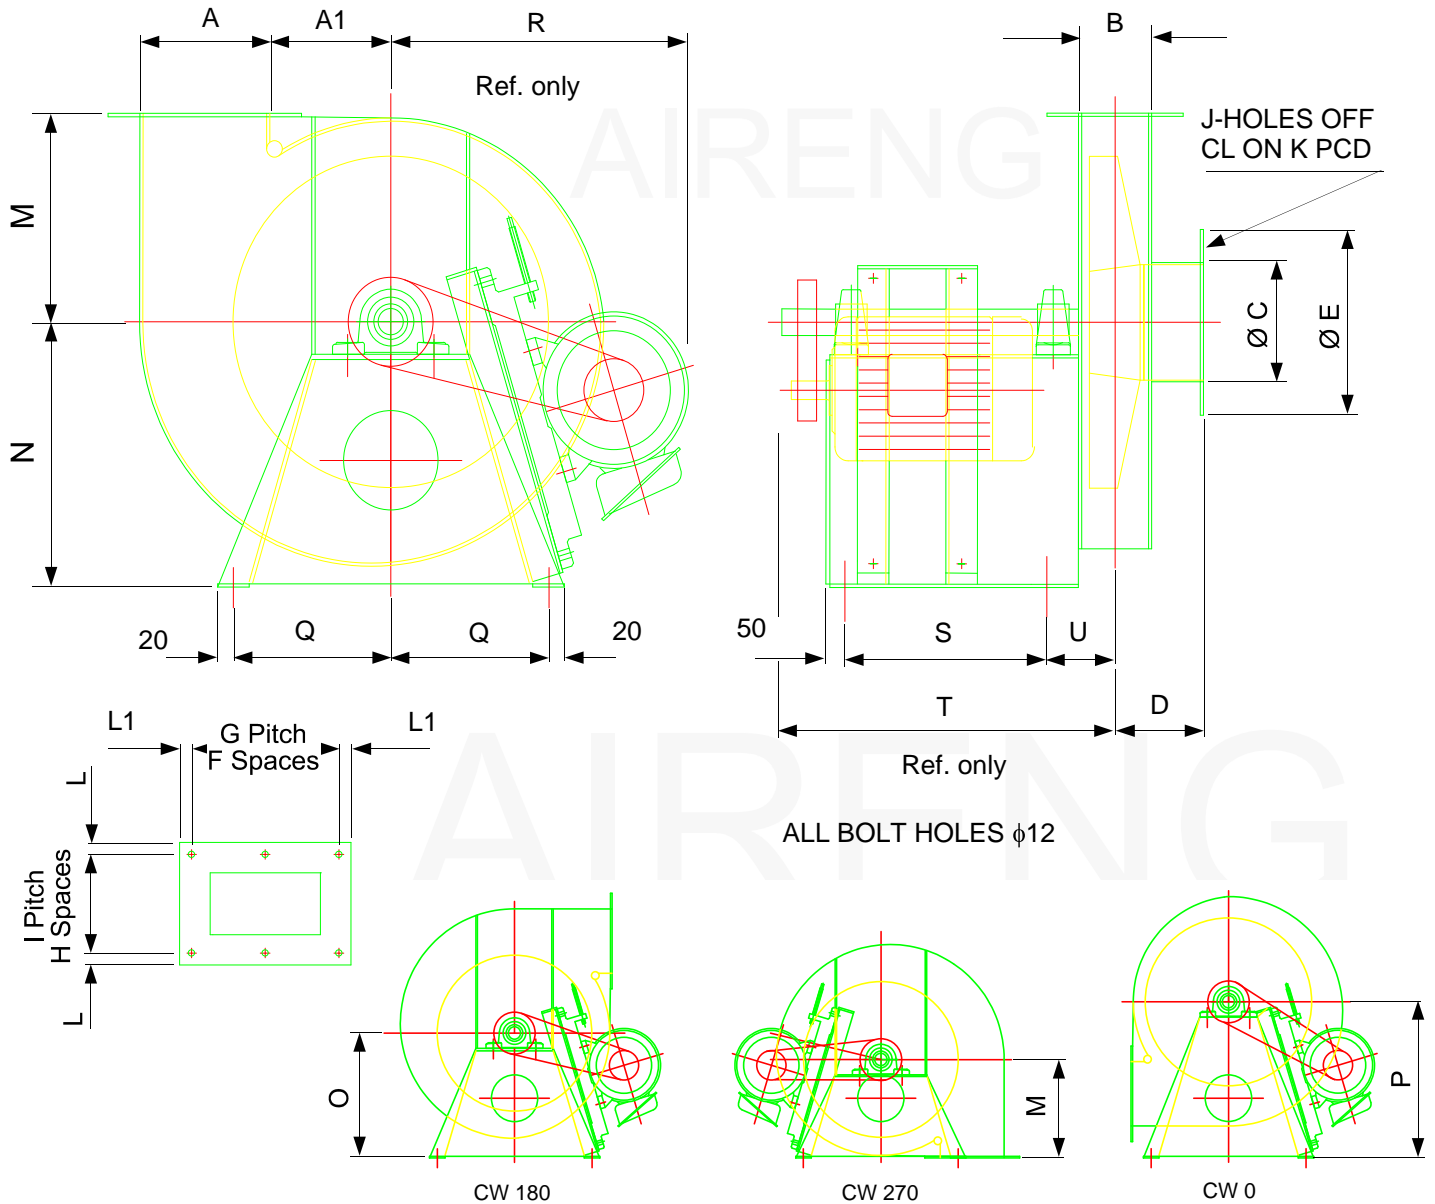

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg	kW
300-00	120	125	100	125	110	205	1	170	1	150	4	175	15	15	190	235	215	295	160				100		
400-00	160	165	130	170	140	250	2	105	2	90	4	220	15	15	250	310	280	375	180				115		
500-00	210	200	160	210	155	290	2	130	2	105	8	260	15	15	320	380	350	460	250				130		
600-00	240	250	190	250	165	330	2	145	2	120	8	300	15	15	370	450	415	540	300	600	545	860	145		
700-00	290	285	220	290	180	370	2	170	2	135	8	340	15	15	430	530	485	625	350				160		
800-00	320	330	250	330	200	430	2	190	2	155	8	390	20	20	500	605	555	710	400				175		
900-00	360	370	280	370	220	470	2	210	2	170	8	430	20	20	550	680	620	790	400				190		

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 1400 RPM Three Phase Motor, Bearings, V-Drive, Slide rails, Shaft / Belt Guards, Shaft and Pedestal

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.9/D9001.pub ISSUE DATE 04-11-98 REV.3