
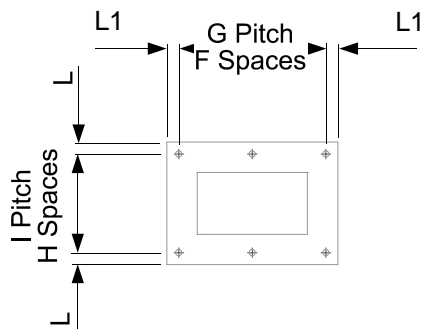
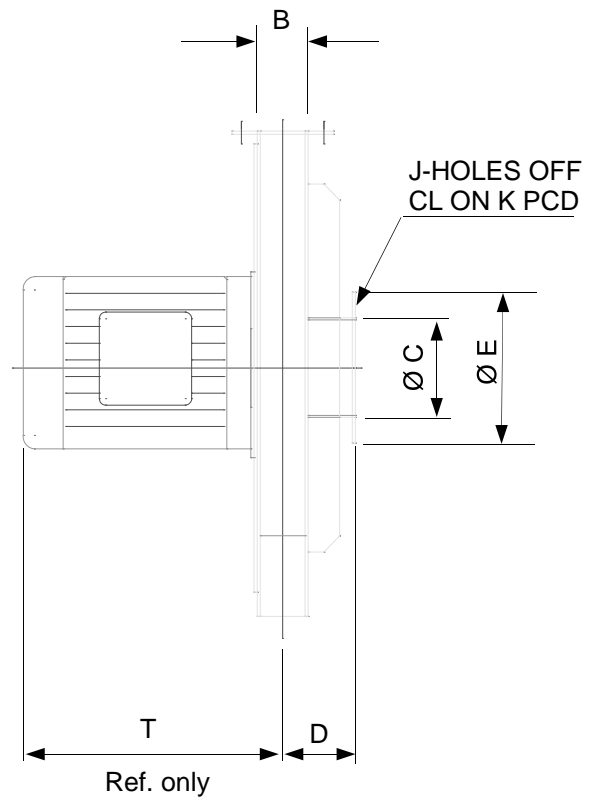


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9007 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 4F-DIRECT DRIVE

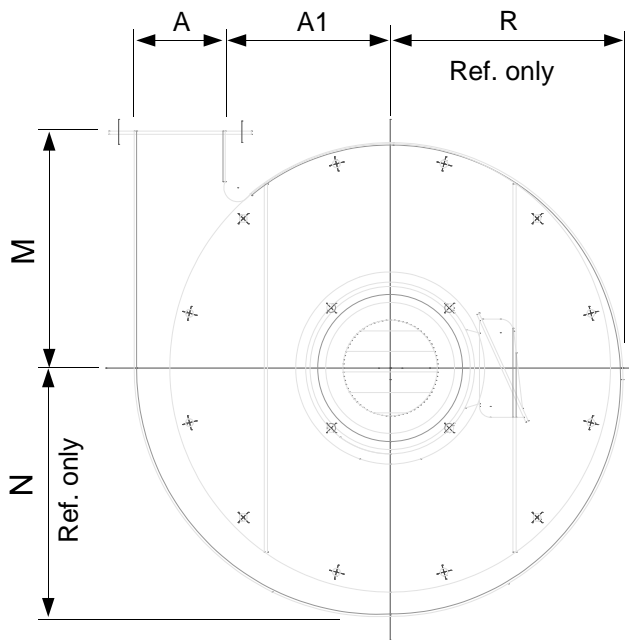

ALL BOLT HOLES $\phi 12$

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	R	T	kg Max	kW Max
300-00	145	115	110	150	120	230	1	195	1	160	4	200	15	15	200	233	210	330		2.2
400-00	190	155	150	200	145	280	2	120	2	100	8	250	15	15	250	310	280	450		7.5
500-00	240	190	190	250	175	325	2	145	2	120	8	300	15	15	320	388	350	620		15
600-00	290	225	220	305	200	385	2	170	2	135	8	355	15	15	390	466	420	745		30
700-00	330	270	260	350	210	430	2	190	2	155	8	400	15	15	440	543	490	830		30
800-00	380	305	290	400	230	500	4	110	2	175	8	460	20	20	500	621	560	1140		30
900-00	430	345	330	450	260	550	4	120	2	195	8	510	20	25	560	698	630	1155		30

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 2900 RPM Three Phase and Motor.

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.4F/D9007.PUB

ISSUE DATE: 05-10-98

REV.2