


AIRENG PTY LTD PERFORMANCE BY DESIGN

DESIGN 9007 HIGH EFFICIENCY PRESSURE BLOWER

ARRANGEMENT 9 V-BELT DRIVE

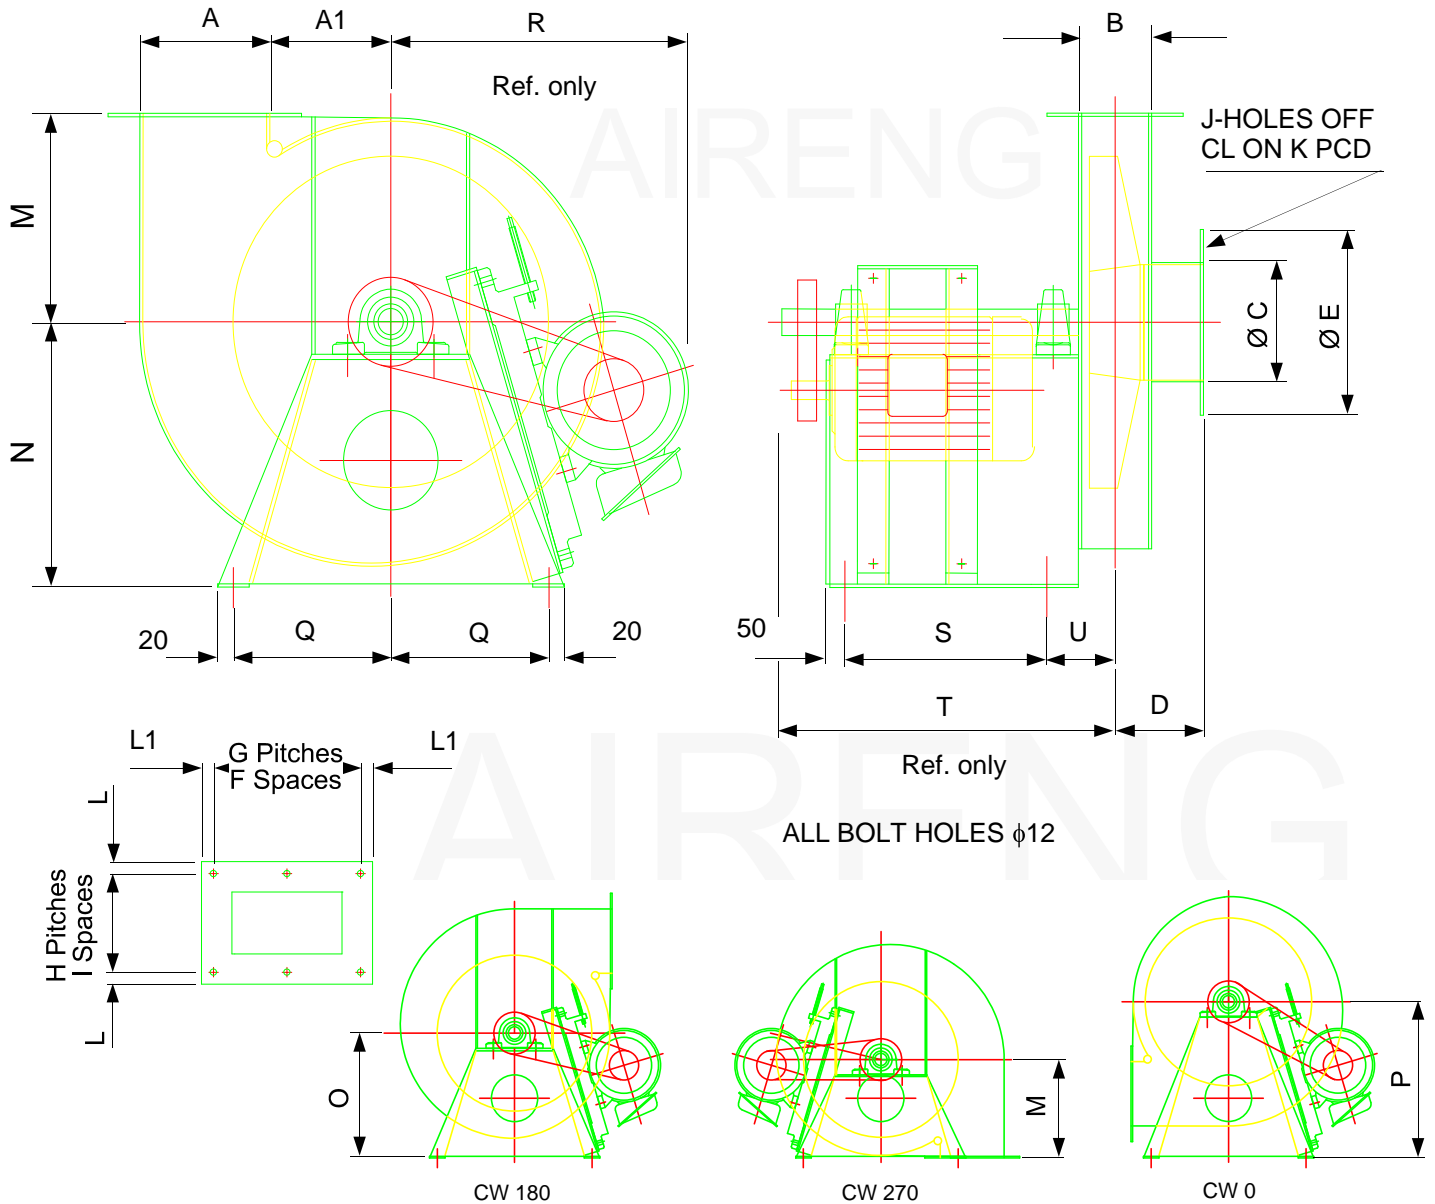

FAN SIZE	A	A1	B	C	D	E	F	G	H	I	J	K	L	L1	M	N	O	P	Q	R	S	T	U	kg	kW
300-00	145	115	110	150	120	230	1	195	1	160	4	200	15	15	200	245	220	310	160				105		
400-00	190	155	150	200	145	280	2	120	2	100	8	250	15	15	250	320	290	395	180				125		
500-00	240	190	190	250	175	325	2	145	2	120	8	300	15	15	320	400	360	480	250				145		
600-00	290	225	220	305	200	385	2	170	2	135	8	355	15	15	390	475	430	565	300				160		
700-00	330	270	260	350	210	430	2	190	2	155	8	400	15	15	440	555	500	650	350				180		
800-00	380	305	290	400	230	500	4	110	2	175	8	460	20	20	500	630	570	745	400				195		
900-00	430	345	330	450	260	550	4	120	2	195	8	510	20	25	560	710	640	835	400				215		

Testing Standards Used: AS2936-1987

STANDARD FAN INCLUDES: Casing 5mm plate (Zinc Rich Primer Coated), Impeller, 1400 RPM Three Phase Motor, Bearings, V-Drive, Slide rails, Shaft / Belt Guards, Shaft and Pedestal

OPTIONS INCLUDE: Matching Flanges, Silencers, H.D. Gal./Special Coating, Flexible Mounts, Hazardous Location Applications, Inspection Door, Drain Plug, Coupling / V-Belt / Petrol Drives, Two Speed Motors, Special Designs.....

IMPELLERS / CASINGS ARE ALSO AVAILABLE IN: ALUMINIUM, PVC, MILD STEEL, STAINLESS STEEL, SPECIAL ALLOYS

Form no. /masters/arr.9/D9001.pub

ISSUE DATE 04-11-98

Rev.3

Form no. /masters/arr.9/D9000.PUB

ISSUE DATE: 1-2-96

REV.1